

## WAREFORCE® HT-180HH

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approval \_\_\_\_\_  
Date \_\_\_\_\_

WAREFORCE® HT-180HH

### Models

WAREFORCE HT-180HH



### Standard Features

- Sani-Sure™ feature ensures proper rinse water temperature
- Multi-cycle timer (Extra Heavy, Heavy, Medium, Normal)
- Extended 15sec. high-temperature rinse provides superior coverage and rapid drying
- 20-3/4" wide X 27" high (527mm X 686mm) opening accommodates 18" X 26" (457mm X 660mm) sheet pans and 60-quart mixing bowls
- Auto-fill/auto-start
- Door switch
- Delime/manual wash switch
- Vent fan control
- Low watt density electric wash tank heater
- Hi-limit thermostat and low water protection
- Adjustable bullet feet
- Uses standard 20" X 20" (508 mm X 508 mm) racks
- Front dress panel
- Detergent/rinse additive signal connection fuse box
- Built-in 70° F (38.9° C) rise booster heater
- Lower counter-rotating wash arms and upper wash arm provide optimum spray coverage and superior cleaning action
- Self-draining stainless steel pump
- Split-door design accommodates installations with low ceiling heights
- Large scrap basket

### Mandatory Specs

Specify voltage \_\_\_\_\_

### Options

- Drain Quench System
- Scaltrol
- Flanged Feet
- Water Hammer Arrestor
- Pressure Regulator
- 480V Electrical
- Single Phase
- Security Package
- False Panel
- Door Interlock

### Accessories

- 36-Compartment Rack
  - 4-1/8" tall (105 mm)
  - 5-5/8" tall (143 mm)
  - 7" tall (178 mm)
- Combination Rack
- Peg Rack
- Sheet Pan Rack - for 18" X 26" (457mm X 660mm) baking pans

### Specifications

Uses 1.36 gallons (5 liters) of 180°F (82°C) water per rack

Total automatic (normal) cycle - 62 seconds

53 racks per hour (normal) cycle

2 HP Wash Pump Motor

Single point connections for all utilities

Field convertible from straight through to corner and vice versa

Durable stainless steel construction




Intertek



Intertek

# WAREFORCE®

## WAREFORCE® HT-180HH

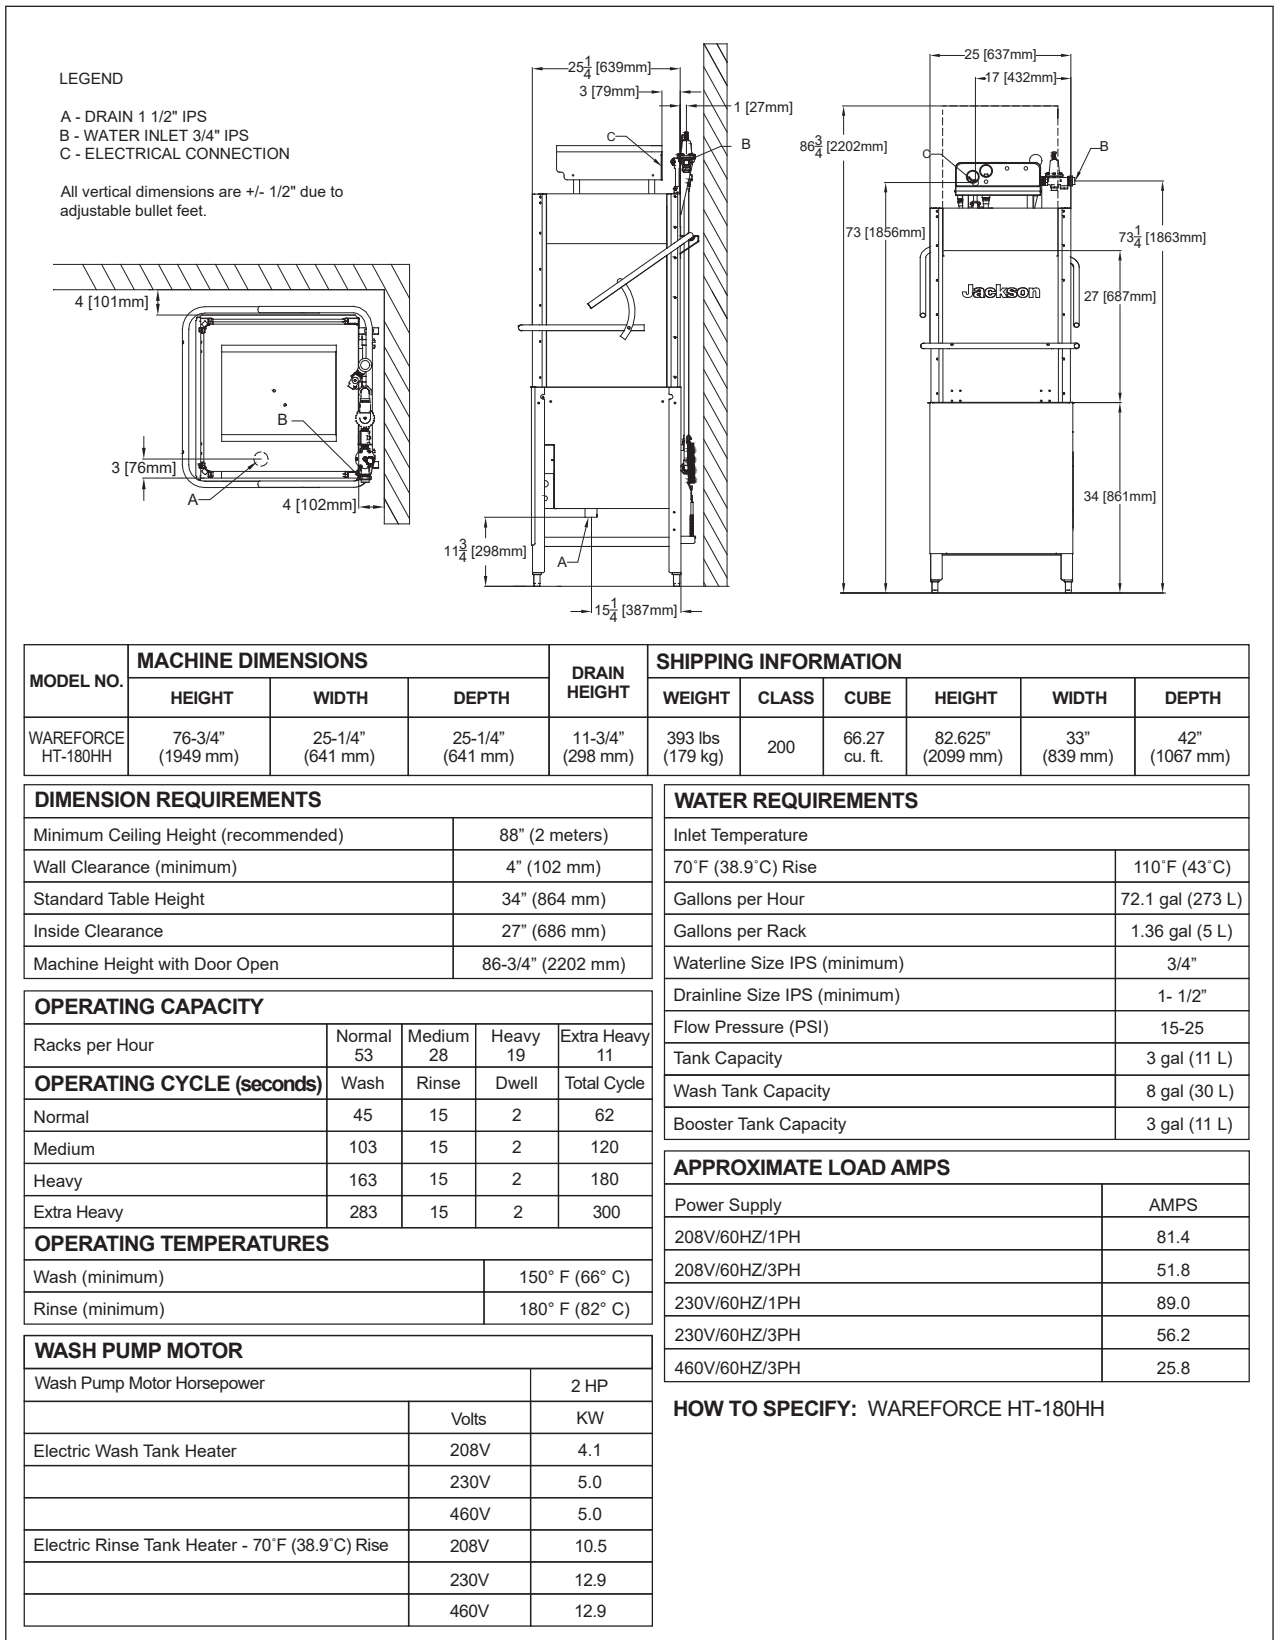

### WAREFORCE®

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734  
 Mailing Address: P.O. Box 1060, Barbourville, KY 40906  
 Telephone: 888-800-5672 • Fax: 606-523-1799  
 Email: info@jacksonwvs.com  
 07610-003-68-69 [10/03/17]

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.